



BRUSHCUTTERS



EFFICIENT-ASK ANY PRO

"We have been very pleased with the performance and durability of our ECHO equipment. We made the switch a year ago, and have not looked back!"

*— Steve Murray
New Leaf Landscape Services
Gainesville, GA*

BRUSHCUTTERS

Power, Comfort and Stability are at your disposal with ECHO's innovative line of commercial-grade brushcutters. Offered in five engine displacements, ECHO has the right brushcutter for applications ranging from rough grass, to thicket, to shrub and dense undergrowth.

42.7 cc Power Boost Vortex™ engine

33.8 fl oz capacity see-through fuel tank for long run times

Rubber over-mold throttle control for all day comfort

Off-set U-handle provides excellent maneuverability and control

SRM-410U shown – see page 29 for more product information



Optional 8" brush blade conversion kit available. See page 32.

60.2" straight shaft with solid steel drive shaft

Heavy-duty gear case with sealed bearings for long-lasting durability


10" brush blade and metal shield



SRM-225U

Delivers strong brushcutting performance in a light, easy-to-use package.

- 21.2 cc Power Boost Vortex™ engine
- 30% reduction in starting effort
- U Turn® trimmer head
- 59" straight shaft
- Offset U-handle with stop switch and throttle lock out delivers maximum operational control and user comfort
- Shoulder harness included

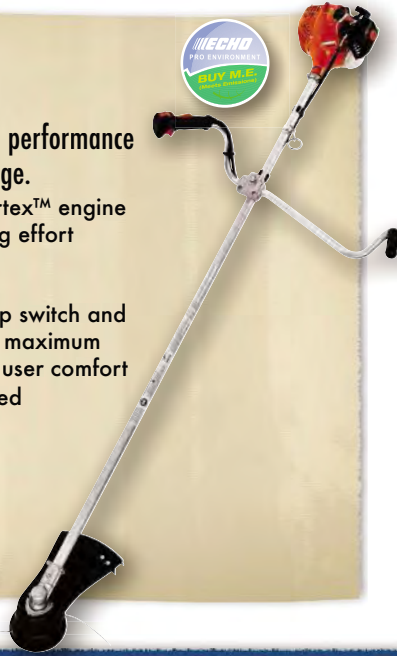


SRM-230U

Provides more power for general brush clearing.

- 22.8 cc Power Boost Tornado™ engine
- 59", 4-layer flex cable drive
- Die-cast clutch cover with heavy-duty vibration reduction system
- ECHOMATIC Pro™ trimmer head and blade conversion kit*
- Offset U-handle with stop switch and throttle lock-out delivers maximum operational control and user comfort
- Shoulder harness standard

* Blade not included

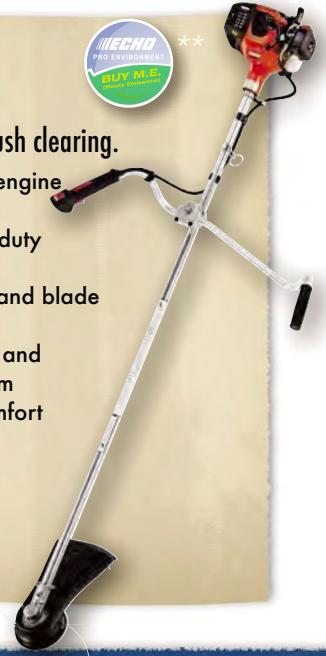

**EPA only.

BRUSHCUTTERS

5 year
Consumer
Warranty

**ECHO Quality
Backed by an
Extensive Warranty**

All ECHO Brushcutters feature a 5 year* consumer, 2 year commercial and 90 day rental warranty as well as a lifetime warranty on the flexible cable drive and ignition module

*Visit www.echo-usa.com/5year to learn more.

SRM-265U

Powerful performance, innovative features and superior design.

- 25.4 cc Power Boost Vortex™ engine
- 30% reduction in starting effort
- Offset U-handle with stop switch and throttle lock-out
- Commercial-grade felt air filtration
- 59", 4-layer flex cable
- Shoulder harness is standard
- Includes blade conversion kit*
- ECHOMATIC Pro™ trimmer head

* Blade not included




SRM-280U

A new class of performance with increased power.

- 28.1 cc Power Boost Vortex™ engine
- Offset U-handle with stop switch and throttle lock-out
- Commercial-grade felt air filtration
- 59", 4-layer flex cable
- Shoulder harness is standard
- Includes blade conversion kit*
- ECHOMATIC Pro™ trimmer head

* Blade not included

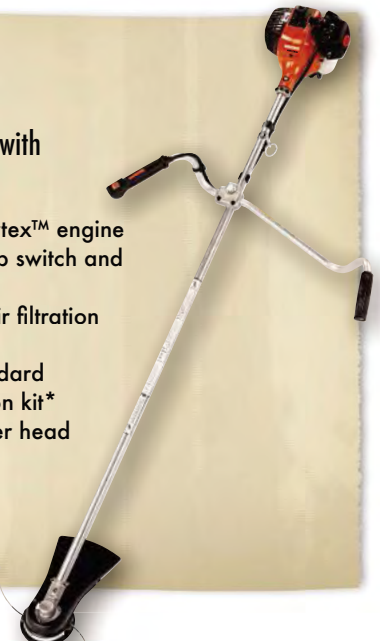

BRUSHCUTTERS




SRM-410U

NEW!

Top-of-the-line brushcutter with maximum power.

- 42.7cc Power Boost™ engine
- Engine vibration reduction system and padded handles
- 60.2" straight steel shaft
- Offset U-handle with stop switch and throttle lock out delivers maximum operational control and user comfort
- 10" brush blade and metal shield
- Shoulder harness included

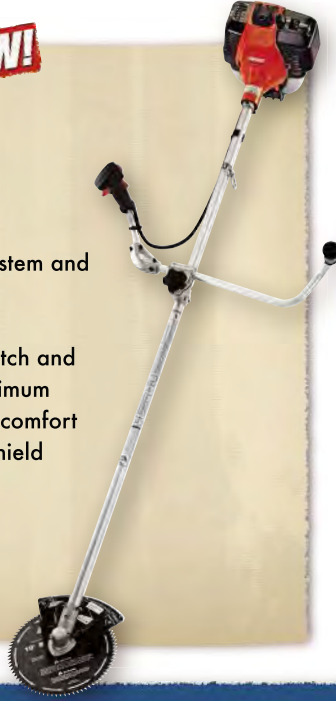

- **WARNING:** Improper use of any trimmer or brushcutter can cause serious or fatal injury. Read, understand and follow all safety instructions in your Operator's and Safety Manuals. A barrier bar and harness must be used with rigid plastic and metal grass/weed blades. A U-handle and harness must be used with brush and clearing blades. Always use the appropriate debris shield for the type of cutting attachment being used, as explained in your Operator's and Safety Manuals.
- **WARNING:** A barrier bar, harness and blade shield must be attached when using a rigid plastic or metal grass/weed blade with front loop handle.
- **WARNING:** A U-handle, harness and blade shield must be attached when using a brush or clearing blade.

The barrier bar, U-handle, harness and blade shield can be purchased separately from your ECHO dealer. See page 33.

BRUSHCUTTERS

BRUSHCUTTER SPECIFICATIONS

Model	Engine Displacement (cc)	Carburetor (w/Purge Pump)	Fuel Capacity	Shaft Length (in)	Shaft Type	Starting System	Cutting Head	Cutting Swath (in)	Shield	Drive Shaft	Arbor Size (mm)	Nylon Line (in dia)	Dry Weight (lb)*	Dry Weight (lb)**
SRM-225U	21.2	Rotary	14.9	59	Straight	i-30™	U Turn™	17	Std. SRM	4-Layer Cable	20	.095 Cross-Fire®	13.7	12.8
SRM-230U	22.8	Rotary	19.6	59	Straight	Standard	ECHOmatic Pro™	17	Std. SRM	4-Layer Cable	20	.095 Cross-Fire®	13.8	13
SRM-265U	25.4	Diaphragm	16.9	59	Straight	i-30™	ECHOmatic Pro™	17	Std. SRM	4-Layer Cable	20	.095 Cross-Fire®	15	14.2
SRM-280U	28.1	Diaphragm	21.6	59	Straight	Standard	ECHOmatic Pro™	17	Std. SRM	4-Layer Cable	20	.095 Cross-Fire®	15	14.2
SRM-410U	42.7	Butterfly-Valve Diaphragm	33.8	60.2	Straight	Standard	10" Brush Blade	10	Metal	Steel	25	10" Brush Blade	-	18.3

* Includes cutting head, excludes harness.

** Without cutting head, includes shield.

BRUSHCUTTER - STANDARD AND OPTIONAL EQUIPMENT

Model	GT ECHOmatic® Head	SRM ECHOmatic® Head	SRM ECHOmatic® II Head	SRM ECHOmatic Pro™ Head	SRM Fixed Head	U Turn® Head	SRM Manual Head	2-Line Rapid-Loader™ Head	3-Line Rapid-Loader™ Head	8-Tooth Grass and Weed Blade	8" Brush Blade	10" Brush Blade	8" 22-Tooth Saw Blade	U-Handle Kit¹	Blade Conversion Kit²
SRM-225U		■		■	■	▲	■	■		■	■		■	▲	▲
SRM-230U		■		▲	■	■	■	■		■	■		■	▲	▲
SRM-265U		■	■	▲	■	■	■	■	■	■	■		■	▲	▲
SRM-280U		■	■	▲	■	■	■	■	■	■	■		■	▲	▲
SRM-410U		■	■	■	■	■	■	■	■	■		▲	■	▲	▲

1 U-handle kit or barrier bar is required for metal blade use. 2 Blade conversion kit is required for metal blades and tri-cut blade. (This chart refers to accessories on pages 30-33.)

Standard ▲ Optional ■